

# MAGMA ExpressBox 16 Basic

## Benefits:


- Transparent extension of PCI Express signals outside the computer
- Industrial solution for adding up to sixteen PCI Exp slots to one computer
- Use any combination of PCIe x1, x4, x8 and x16
- Attach full-length PCI Express cards computers with limited card space
- Low profile host card allows for easy installation in I profile computers
- Supports peer-to-peer transfers between cards in the expansion chassis to provide full-bandwidth potential among I/O cards
- Daisy chain or fan out multiple expansion chassis to on computer



## Features:

- Easy "Plug and Play" installation
- LEDs on backplane indicate active link, speed (Gen 1 or Gen 2), partial or complete lane training
- High-speed x8 or x16 interconnection
- Industrial 4U rack-mount enclosure
- Chassis provides superior EMI control, vibration, shock and moisture resistance
- Card hold down retainer
- All slots support full-length cards
- Four hot-swappable cooling fans
- Multiple power supply options with auxiliary power connectors to support cards requiring more than 75 Watts
- Automatic power-up control by computer

# MAGMA ExpressBox 16 Basic

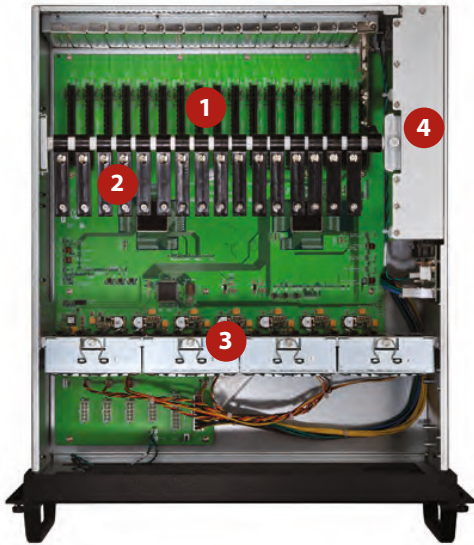

### EB16 – Top View

1. Sixteen PCI Express slots
2. Card Retainers
3. Cooling fans (Hot-Swappable)
4. Power Supply



### EB16 – Rear View

5. PCI Express card slot opening
6. iPass connector for cable
7. Power cord socket(s)
8. Power Switch

### Hardware Included

9. 3m iPass cable
10. PCI Express Host Card (x8 or x16)



## Configurations:

All Magma products can be purchased online at [www.magma.com](http://www.magma.com) or through a reseller.

#### Base Models:

- EB16-BX4: ExpressBox 16 - (16) x4 PCIe slots
- EB16-BX8: ExpressBox 16 - (14) x8 and (2) x16 PCIe slots

#### Interconnect Options:

- X8 connection to computer
- X16 connection to computer

#### Power Supply Options:

- Standard 850 Watt
- Standard 1700 Watt
- Redundant 850 Watt

## Specifications:

<b>Technology</b> PCI Express Bus Specification Revision 2.0 PCI Local Bus Specification Revision 2.3 PCI Bridge Architecture Revision 1.2	<b>System Cooling</b> Four 77CFM Backplane Fans - hot-swappable Power Supply Fan(s)	<b>Regulatory Compliance</b> FCC Class A Verified RoHS Compliant
<b>Backplane</b> EB16-BX4 - 16 slots, x4 PCIe EB16-BX8 - 14 slots, x8 PCIe & 2 slots, x16 PCIe	<b>Host Connections and Power Consumption</b> Low profile x8 PCIe: 1.25A @ +3.3V maximum x16 PCIe: 1.5A @ +3.3V maximum	<b>Supported Operating Systems</b> Windows MacOS X Linux Solaris
<b>Cable</b> 3-meter iPass	<b>Chassis Power Supply</b> 850 Watt, 1700 Watt or 850 Watt Redundant 100-240 VAC, 47-63 Hz Power Input 12V @ 60 Amps 3.3V @ 33 Amps	<b>Warranty</b> Money back guarantee 1 year return to factory
<b>Interconnect Bandwidth</b> 40Gbps (PCIe x8 Gen 2) 80Gbps (PCIe x16 Gen 2)	<b>Environmental</b> Ambient Temperature 0° to 50° C Storage Temperature -55° to 125° C Relative Humidity: 0% to 90% non-condensing	
<b>Enclosure</b> 4U Rack-mount 19" W x 7" H x 20" D Removable/cleanable air filter 28 lbs or 13Kg	<b>MTBF</b> 850W standard power supply - 185,600 hrs 1700W dual standard power supply - 106,600 hrs 850W redundant power supply - 720,000 hrs	
<b>Rack Installation</b> Optional Chassis Trak® rack slide kit		