

# ANT LNX-C500 Series


## Compact 5-Port Industrial Unmanged Ethernet Switches, w/5\*10/100Tx, 12~48VDC Power Input

### Features

- Compact Industrial Grade Design
- Supports 5-Port 10/100Tx RJ45 Fast Ethernet
- Supports Auto MDI/MDI-X Function
- Store-and-Forward Switching Architecture
- Surge Protection: 2,000 VDC Support
- ESD Protection: 6,000 VDC Support
- Redundant Power Input Design: 12~48VDC
- Power Polarity Reserve Protect
- Overload Current Protection
- IP30 Rugged Metal Case Design
- DIN-Rail and Wall Mount Support
- Operating Temperature Range:  
STD: -10° to 70°C, EOT: -40° to 75°C
- 5-Year Warranty



### DIMENSIONS

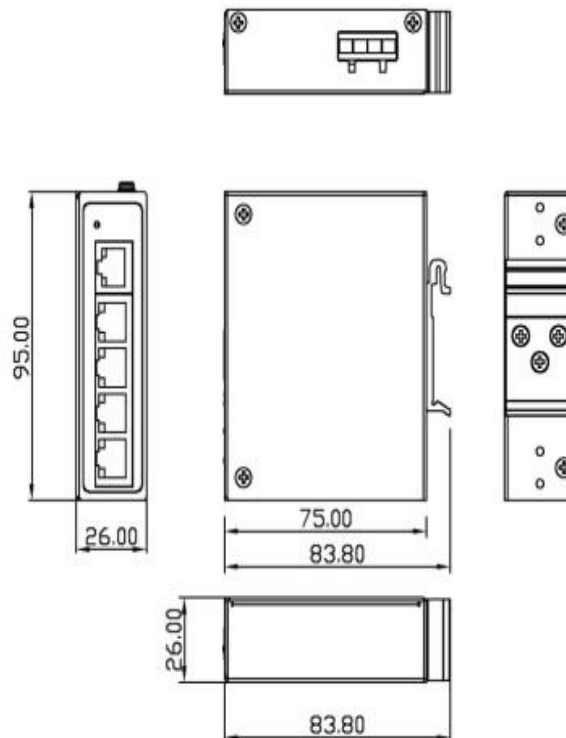

# ANT LNX-C500 Series

## SPECIFICATIONS

Technology		Mechanical Characteristics	
<b>Standards</b>	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet	<b>LED Indicator</b>	Per Unit: Power 1 & 2
<b>Switch Properties</b>		<b>Housing</b>	Metal IP30 rated
<b>Protocol</b>	CSMA/CD	<b>Dimensions</b>	26 x 95 x 75 mm
<b>Data Process</b>	Store and forward	<b>Weight</b>	Unit: 1.0 lbs; Shipping: 1.5 lbs
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet port 148,880pps for 100Base-T Fast Ethernet port	<b>Mounting</b>	DIN-Rail; Wall-mount (optional)
<b>Packet Buffer</b>	448 Kbits	<b>Power Requirement</b>	
<b>MAC Table</b>	8K	<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	<b>Power Connection</b>	1 removable 4-contact terminal block
<b>Power Consumption</b>		<b>Power Consumption</b>	1.2 Watts
<b>Port Interface</b>		<b>Environmental Limits</b>	
<b>Ethernet RJ45 Port</b>	5*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	<b>Operating Temperature</b>	STD: -10° to 70° C EOT: -40° to 75° C
<b>Protection</b>		<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Overload Current</b>	Present	<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Power Reverse Polarity</b>	Present (the unit will not be on, if power reverse)	<b>Regulatory Approvals</b>	
<b>Network Cable</b>	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable.	<b>EMI</b>	FCC Class A
		<b>EMS</b>	EN61000-4-2,3,4,5,6,8
		<b>Free Fall</b>	IEC60068-2-32
		<b>Shock</b>	IEC60068-2-27
		<b>Vibration</b>	IEC60068-2-6
		<b>Green</b>	RoHS Compliant
		<b>Certifications</b>	FCC, CE, UL-61010-1,61010-2-201 (Pending)
		<b>Compliance</b>	NEMA TS1/TS2
		<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LNX-C500</b>	Compact 5-Port Industrial Ethernet Switch with 5*10/100Tx
<b>LNX-C500-T</b>	Compact 5-Port Industrial Ethernet Switch with 5*10/100Tx; EOT -40° to 75°C

Optional Accessories	
<b>DR-15-12</b>	15W Industrial DIN-Rail Power Supply, 12VDC
<b>MDR-20-24</b>	20W Industrial DIN-Rail Power Supply, 24VDC
<b>MDR-40-48</b>	40W Industrial DIN-Rail Power Supply, 48VDC
<b>MDR-60-48</b>	60W Industrial DIN-Rail Power Supply, 48VDC
<b>DR-75-48</b>	75W Industrial DIN-Rail Power Supply, 48VDC