

BT-7901/ 7902/ 7903

Robust Box PC with Intel® Xeon® E3/6th & 7th Generation Core™ i7/i5/i3 Processor

Features

- Fanless design
- Wide range DC power input (9~36V)
- DP/HDMI Combo x1+HDMI +VGA x1+DVI x1 (support 3 independent display)
- Power on/off delay control / configurable ignition power control
- TPM2.0 support
- RTC battery service window support
- Two-mPCIe for optional WiFi/3G/4G/GPS or I/O expansion supported
- 2 SATA SSD (1 x removable, 1 x internal), support RAID 0,1
- Front-accessible I/O support




System	
CPU	Intel® Xeon® E3/6 th & 7 th generation Core™ i7/i5/i3 processor in LGA1151 socket
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 2133 MHz SDRAM up to 32GB
Chipset	Intel® C236
Graphics	Integrated Intel® HD Graphics
ATA	2 x Serial ATA ports with 600MB/s HDD transfer rate
LAN Chipset	2 x Intel® WGI211AT GbE controllers 1 x Intel® WGI219LM GbE controller w/ iAMT 11.0
Watchdog Timer	1~255 levels reset
I/O	
Serial Port	2 x RS-232/422/485 configurable via DB-9 connectors 4 x RS-232 ports via DB-9 connectors
USB Port	6 x USB 3.0/ 2.0 ports Internal USB dongle (Optional)
LAN	3 x RJ-45 ports for GbE
Video Port	1 x DP/HDMI Combo
	1 x HDMI
	1 x DB-15 female connector for Analog RGB 1 x DVI-D female connector for digital video output * Support 3 independent display
Selectable Port	1 x DB25 connector for 1 x DIO (8 in/8 out) port or 1 x LPT port (either one)
Audio	Mic-in/Line-out
Expansion Bus	1 full-size & 1 half-size Mini-card interconnected for optional WiFi/3G/4G/GPS or I/O Expansion
	1 x SIM socket
	1 x PCIe x16 slot + 1 x PCI slot (FPC-7901) 1 x PCIe x16 slot + 1 x PCIe x8 slot (via x 4 lanes) (FPC-7902) 2 x PCI (FPC-7903)
Environmental	
Operating Temp.	-20 ~ 55°C (-4 ~ 131°F), ambient w/ air flow, (w/ 35W TDP CPU, fanless) -20 ~ 50°C (-4 ~ 122°F), ambient w/ air flow (w/ 51W/65W TDP CPU, w/ SMART FAN control)

Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Vibration	3 Grms/5~500Hz/random operation w/ SSD
Shock	Operating 40G (11ms), Non-operating 60G with SSD Crash 100G, 11ms
Qualification	
Certification	CE, FCC Class A
Power Requirement	
Power Input	DC 9~36V input (w/ 4-pin DC input terminal block, combining remote power on/off switch
Ignition Switch	2-pin terminal block : IGN, GND
Power Consumption	Max. 75W (w/o I/O card)
Storage	
Type	2 x 2.5" drive bays 1 x CFast socket, can be outside accessible
Mechanical	
Construction	Aluminum alloy
Mounting	Wall-mount
Weight	7kg (15.43lb)
Dimensions (W x H x D)	250 x 292 x 120mm (9.84" x 11.50" x 4.72")
OS Support	
Windows 10 IOT (For 7th Gen Intel CPU) Windows 7 / Windows 8.1 / Windows 10 IOT (For 6th Gen Intel CPU) Linux (Kernel 4.4.x)	
Ordering Information	
BT-7901	Fanless box PC for 35W CPU, w/ 1 x PCIe x16 + 1 x PCI
BT-7902	Fanless box PC for 35W CPU, w/ 1 x PCIe x16 + 1 x PCIe x8
BT-7903	Fanless box PC for 35W CPU, w/ 2 x PCI
BT-7901-W65	Box PC for 51W/65W CPU w/ SMART FAN, 1 x PCIe x16 + 1 x PCI (BTO)
BT-7902-W65	Box PC for 51W/65W CPU w/ SMART FAN, 1 x PCIe x16 + 1 x PCIe x8 (BTO)
BT-7903-W65	Box PC for 51W/65W CPU w/ SMART FAN, 2 x PCI (BTO)

BT-7901/ 7902/ 7903

Dimensions

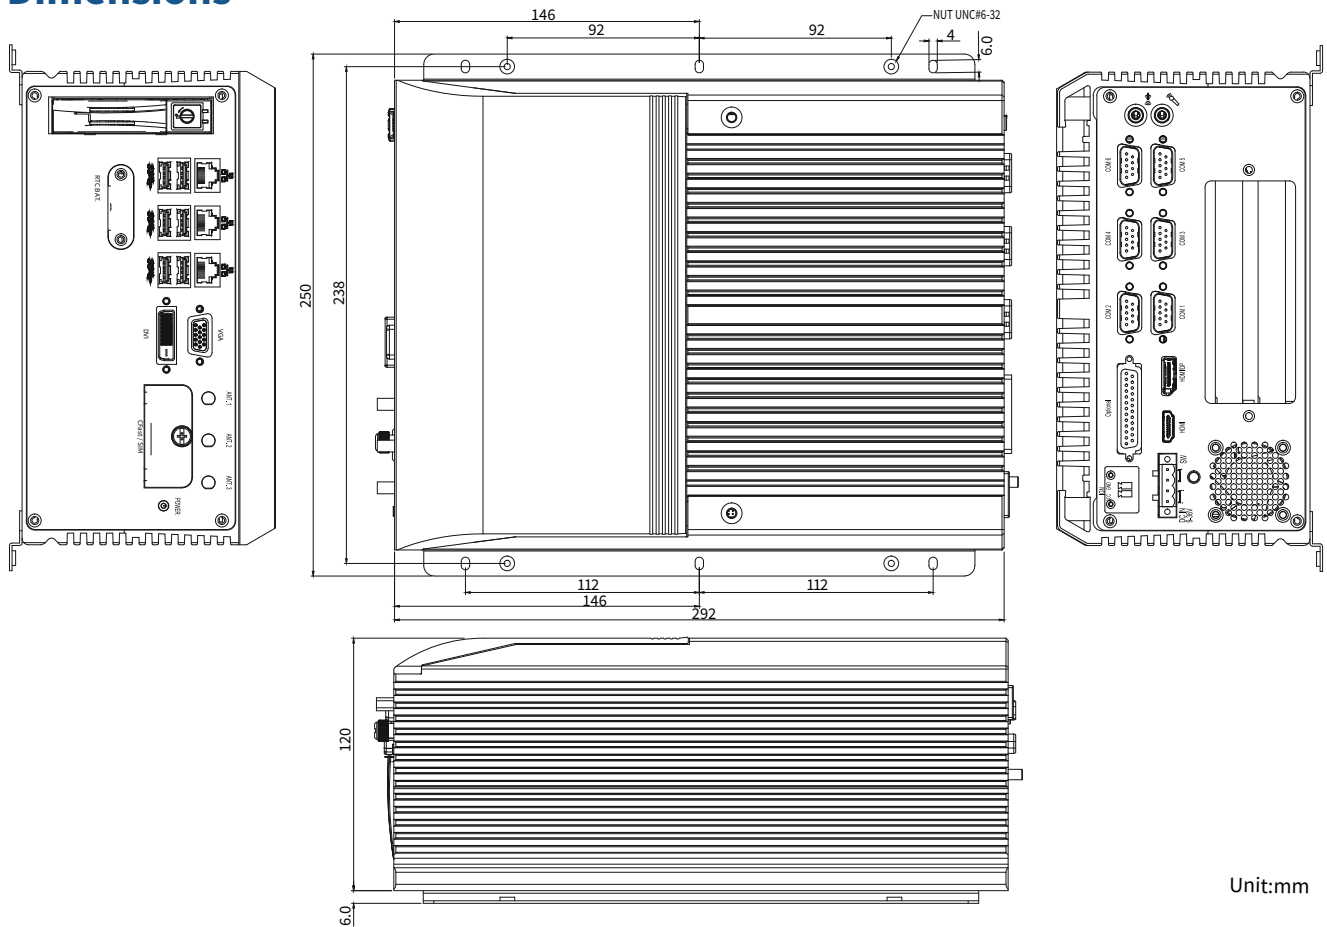

Unit:mm

Optional Accessories

WMK-7000	Wall-mount kit for FPC-7XXX Series	
PAC-120W6B-FSP	120W AC/DC adapter kit w/ 2-pin/3-pin/4-pin block	

Optional Configuration (CTOS* Kit)

150GB SSD	Intel® 2.5" 150GB SATAIII SSD kit	
WIFI-AT2350	Atheros AR9462 Wi-Fi module w/ 20&30cm internal wires	
ANT-H11	1 x 2dBi HSUPA antenna	
ANT-D11	1 x WiFi dual-band 2.4G/5G antenna	
Core™ i7-7700T	Intel® 7 th Gen. Core™ i7-7700T processor, L2/8M, 2.9G	
Core™ i5-7500T	Intel® 7 th Gen. Core™ i5-7500T processor, L2/6M, 2.7G	
Core™ i3-7101TE	Intel® 7 th Gen. Core™ i3-7101TE processor, L2/3M, 3.4G	
Core™ i5-7500	Intel® 7 th Gen. Core™ i5-7500 processor, L2/6M, 3.4G	

