

Nuvo-7000E/P/DE Series

Fanless rugged embedded Box PC with Intel® 9th/ 8th-Gen Core™ i7/i5/i3

- Intel® 8th/ 9th-Gen Core™ i hexa-core 35W/ 65W LGA1151 CPU
- Patented Cassette for PCI/PCIe add-on card accommodation*
- MeziO™ interface for easy function expansion
- Rugged, -25°C to 70°C fanless operation
- Up to 6x GigE ports, supporting 9.5 KB jumbo frame
- M.2 2280 M key socket (Gen3 x4) supporting NVMe SSD or Intel® Optane™ memory
- 4x USB 3.1 Gen2 ports and 4x USB 3.1 Gen1 ports
- VGA/ DVI/ DP triple independent display, supporting 4K2K resolution



CE FC *R.O.C Patent No. M456527

Introduction

The Neosys Nuvo-7000 series is powered by Intel® 8th/ 9th-Gen Core™ i processors with up to 6-core/ 8-core architecture that offer significant performance improvement over previous 6th and 7th-Gen platforms.

Nuvo-7000 series includes Neosys' track-proven technologies for superior ruggedness and versatility, such as effective fanless design, patented expansion Cassette and proprietary MeziO™ interface. It also incorporates cutting-edge computer I/O like USB 3.1 Gen2 with up to 10 Gbps throughput and M.2 2280 M key socket for NVMe SSD or Intel® Optane™ memory for ultimate system performance. The plethora of on-board I/O ports (GbE, USB and COM) feature sophisticated protection circuits to endure stress from ESD and power surge. This makes Nuvo-7000 series one of the most solid embedded controller on the market.

Flexible and versatile for a variety of applications, Nuvo-7000 variants are available with different Cassette expansion options. With Neosys Nuvo-7000 series, you get a true rugged platform that can accommodate a single PCIe card (Nuvo-7000E), dual PCIe cards (Nuvo-7000DE) or a single PCI card (Nuvo-7000P) according your application needs.

Specifications


System Core	Expansion Bus
Processor Supporting Intel® 8th/ 9th-Gen CPU (LGA1151 socket, 65W/ 35W TDP) - Intel® Core™ i7-8700/ i7-8700T/ i7-9700E/ i7-9700TE - Intel® Core™ i5-8500/ i5-8500T/ i5-9500E/ i5-9500TE - Intel® Core™ i3-8100/ i3-8100T/ i3-9100E/ i3-9100TE - Intel® Pentium® G5400/ G5400T - Intel® Celeron® G4900/ G4900T	PCI/PCI Express 1x PCIe x16 slot@Gen3, 8-lanes PCIe signals in Cassette (Nuvo-7002E/ 7006E) 2x PCIe x8 slots@Gen3, 4-lanes PCIe signals in Cassette (Nuvo-7002DE/ 7006DE) 1x PCI slot in Cassette (Nuvo-7002P/ 7006P)
Chipset Intel® Q370 platform controller hub	Mini PCI Express 1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA)
Graphics Integrated Intel® UHD graphics 630	M.2 1x M.2 2242 B key socket with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
Memory Up to 64 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	Expandable I/O 1x MeziO™ expansion port for Neosys MeziO™ modules
AMT Supports AMT 12.0	Power Supply DC Input 1x 3-pin pluggable terminal block for 8-35VDC input
TPM Supports TPM 2.0	Remote Ctrl. & LED Output 1x 3-pin pluggable terminal block for remote control and PWR LED output
I/O Interface	Mechanical
Ethernet 2x Gigabit Ethernet ports by I219 and I210 (Nuvo-7002E/ P/ DE) 6x Gigabit Ethernet ports by I219 and 5x I210 (Nuvo-7006E/ P/ DE)	Dimension 240 mm (W) x 225 mm (D) x 90 mm (H) (Nuvo-7000E/ P series) 240 mm (W) x 225 mm (D) x 110.5 mm (H) (Nuvo-7000DE series)
PoE+ Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	Weight 3.58 kg (Nuvo-7000E/ P series) 3.7 kg (Nuvo-7000DE series)
USB 4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	Mounting Wall-mount (standard) or DIN-Rail (optional)
Video Port (Integrated Graphics) 1x VGA connector, supporting 1920 x 1200 resolution 1x DVI-D connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution	Environmental
Serial Port 2x software-programmable RS-232/ 422/ 485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	Operating Temperature with 35W CPU -25°C ~ 70°C ** with 65W CPU -25°C ~ 70°C */** (configured as 35W TDP) -25°C ~ 50°C */** (configured as 65W TDP)
Audio 1x 3.5 mm jack for mic-in and speaker-out	Storage Temperature -40°C ~ 85°C
Storage Interface	Humidity 10%~90% , non-condensing
SATA HDD 2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	Vibration Operating, MIL-STD-810G, Method 514.6, Category 4
M.2 1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation	Shock Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
mSATA 1x full-size mSATA port (mux with mini-PCIe)	EMC CE/FCC Class A, according to EN 55032 & EN 55024

* For i7-8700 and i7-9700E running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.


** For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

Nuvo-7000E/P/DE Series

Appearance

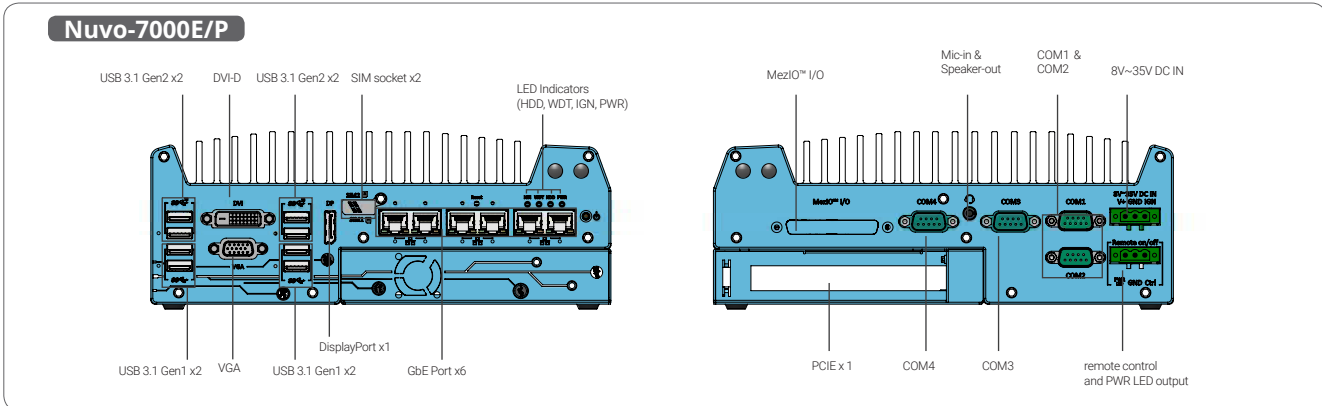

Dimensions

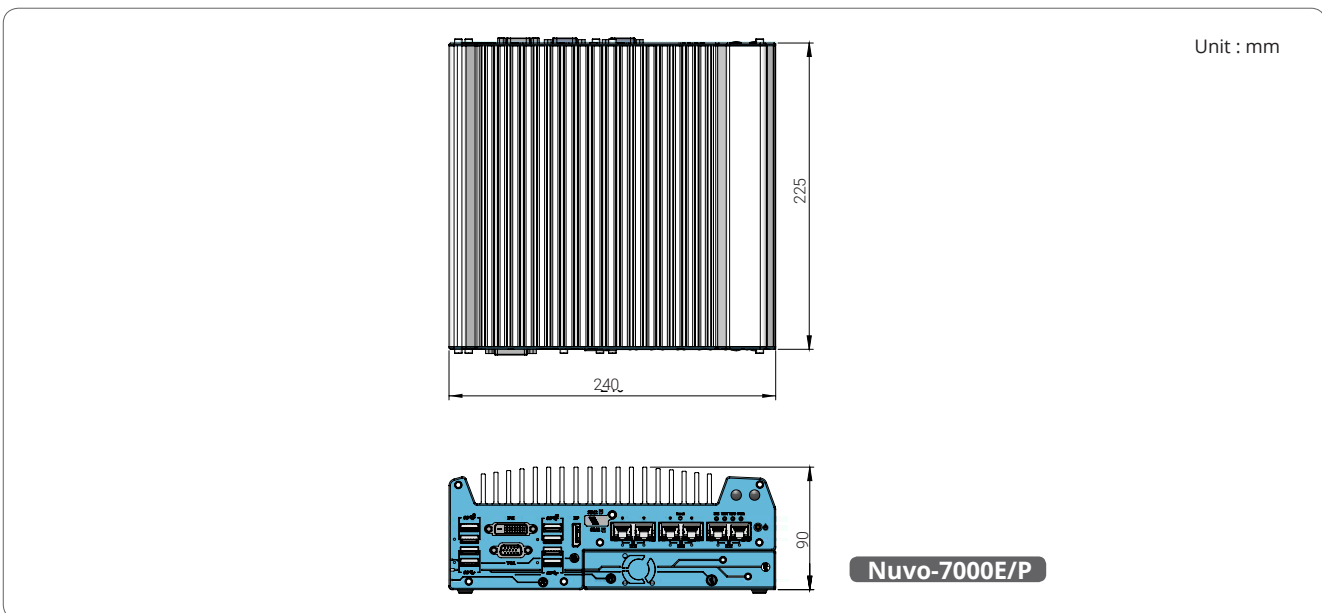

Ordering information

Model No.	Product Description
Nuvo-7002E	Intel® 8th/ 9th-Gen Core™ fanless controller with 2x GbE, single-slot PCI Express Cassette and MeziO™ interface
Nuvo-7002P	Intel® 8th/ 9th-Gen Core™ fanless controller with 2x GbE, single-slot PCI Cassette and MeziO™ interface
Nuvo-7006E	Intel® 8th/ 9th-Gen Core™ fanless controller with 6x GbE, single-slot PCI Express Cassette and MeziO™ interface
Nuvo-7006P	Intel® 8th/ 9th-Gen Core™ fanless controller with 6x GbE, single-slot PCI Cassette and MeziO™ interface
Optional IEEE 802.3at PoE+ for GbE ports 3 ~ 6	

Optional accessories

DINRAIL-O	DIN-rail mounting assembly for Nuvo-7000 series
Dmpbr-Nuvo5000_7000	Neosys' patented damping bracket assembly for Nuvo-7000E/DE/P
Fankit-25	Fan assembly for 1-slot Cassette, 25x25x10 mm
PA-160W-OW	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30°C to 70°C.
ETHY-100-2008S	Ethernet I/O expansion module with 8 isolated digital inputs and outputs
ETHY-100-2604S	Ethernet I/O expansion module with 8 isolated digital inputs and 4 relays outputs (coming soon)
Cassette Modules	
CSM-PoE354	Cassette module with PCIe-PoE354at and pre-installed passive heat-spreader
CSM-USB380	Cassette module with PCIe-USB380 and pre-installed


MeziO™ Modules

MeziO™ -C180	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
MeziO™ -C181	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
MeziO™ -D220	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
MeziO™ -D230	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
MeziO™ -V20-EP	MeziO™ module with ignition power control function for in-vehicle application
MeziO™ -U4	MeziO™ module with 4x USB3.0 ports
MeziO™ -G4	MeziO™ module with 4x GigE ports
MeziO™ -G4P	MeziO™ module with 4x IEEE 802.3at PoE+ ports


Only Nuvo-7006E-PoE and Nuvo-7006P-PoE support MeziO-G4P

Nuvo-7000E/P/DE Series

Appearance

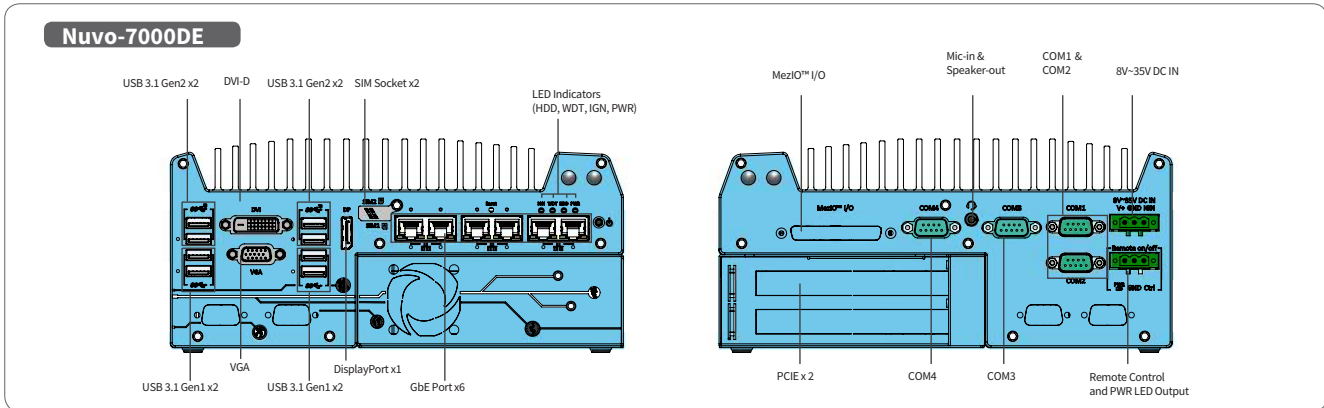

Dimensions

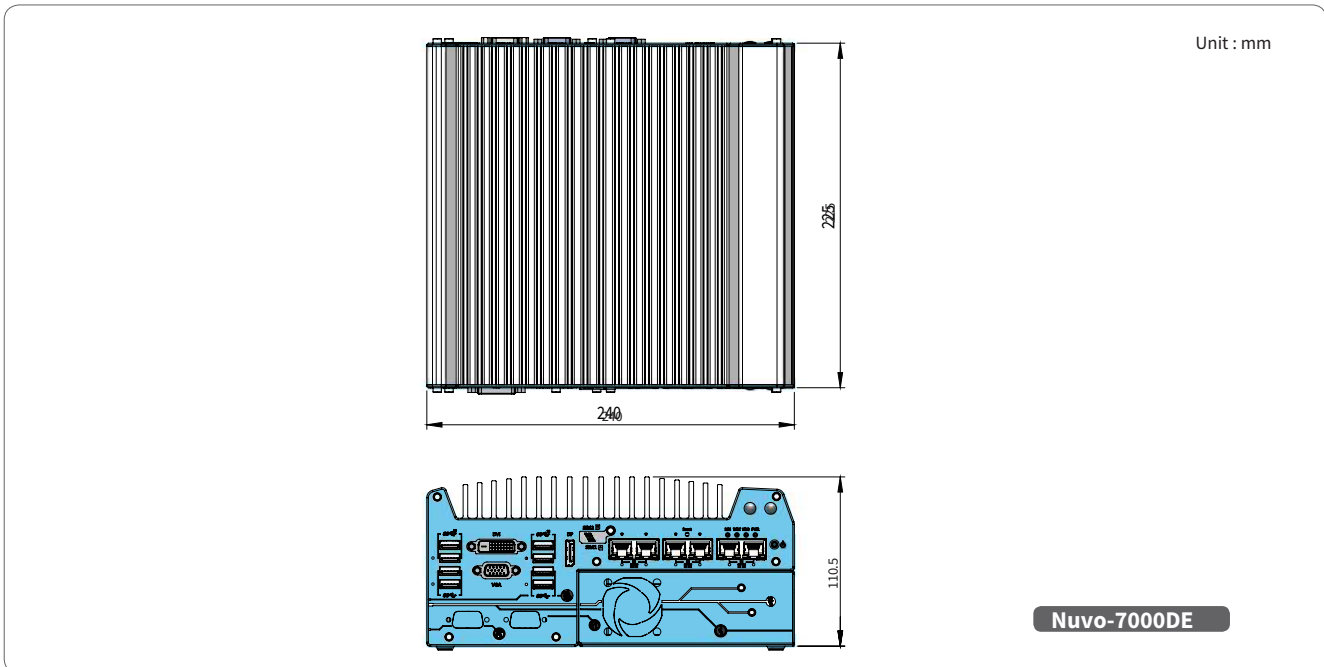

Ordering information

Model No.	Product Description
Nuvo-7002DE	Intel® 8th/9th-Gen Core™ fanless controller with 2x GbE, dual-slot PCI Express Cassette and MeziO™ interface
Nuvo-7006DE	Intel® 8th/9th-Gen Core™ fanless controller with 6x GbE, dual-slot PCI Express Cassette and MeziO™ interface
<i>Optional IEEE 802.3at PoE+ for GbE ports 3 ~ 6</i>	

Optional accessories

PA-160W-OW	160W AC/DC power adapter 20V/8A;18AWGx4C/120cm, cord end terminals for terminal block, operating temperature : -30 to 70°C.
Fankit-40	Fan assembly for 1-slot Cassette, 40x40x10 mm
Dmpbr-Nuvo5000_7000	Neosys' patented damping bracket assembly for Nuvo-7000E/DE/P
DINRAIL-O	DIN-rail mounting assembly for Nuvo-7000 series
ETHY-100-2008S	Ethernet I/O expansion module with 8 isolated digital inputs and outputs
ETHY-100-2604S	Ethernet I/O expansion module with 8 isolated digital inputs and 4 relays outputs (coming soon)
MeziO™ Modules	
MeziO™-C180	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
MeziO™-C181	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
MeziO™-D220	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
MeziO™-D230	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
MeziO™-V20-EP	MeziO™ module with ignition power control function for in-vehicle application