


# OSS-PCIe-HIB38-x8-QUAD

## PCIe x8 Gen 3 QUAD-port Cable Adapter

### Features

- Operates at up to 64Gb/s at PCIe Gen 3 speeds
- I/O expansion requires no additional software
- Card supports 4 modes: host mode, target mode, dual host

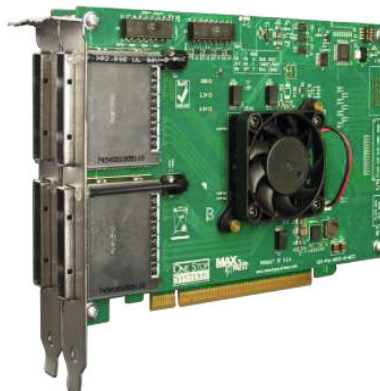

### Specifications

Form Factor:	Dual width PCIe add-in card
Dimensions:	5.85 x 4.00" (14.85 x 10.16 cm)
Connectors:	Quad PCIe x8 cable connectors PCIe x16 edge connector
Operating Temperature:	0°C to +50°C
Storage Temperature:	-40°C to 85°C
Operating Humidity:	10% to 90% relative humidity non-condensing
Storage Humidity: PCB:	5% to 95% relative humidity non-condensing
PCIe Switch:	PCI Express add-in card standard Thickness .063 +/-0.008 inch (1.6 +/- 0.2mm)
Spread Spectrum: Age ncy Compliance:	<ul style="list-style-type: none"> <li>• PLX PEX8733</li> <li>• 8.0 GT/s 32-Lane PCI Express Gen 3 Switch</li> <li>• DMA controller</li> </ul> Supports spread spectrum isolation Designed to meet: FCC Class A CE RoHS